


ORTHON CANNULATED SCREW INSTRUMENTS 7.0MM

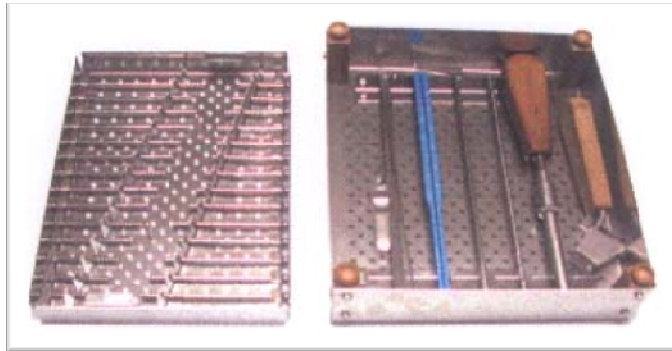

IN STERILIZING CONTAINER

ITEM NUMBER: INS-O-CSL

CAT NO	DESCRIPTION	QUANTITY
CSL-001	SELF HOLDING SCREW FORCEPS	1
CSL-002	PARRALEL WIRE GUIDE	1
CSL-003	LARGE CANNULATED SCREW DRIVER	1
CSL-004	HOLDING SLEEVE FOR CSL-O-003	1
CSL-005	DIRECT MEASURING DEVICE	1
CSL-006	CANNULATED DRILL BIT 4.5MM	1
CSL-007	CANNULATED TAP	1
CSL-008	STYLET 2.0MM	1
CSL-009	THREADED GUIDE WIRE 2.0MM	1

CSL-001 SELF HOLDING SCREW FORCEPS



CSL-002 PARRELEL WIRE GUIDE FOR GUIDEWIRES 2.0MM



CSL-003 CANNULATED SCREW DRIVER



CSL-004 HOLDING SLEEVE FOR CSL-O-003




CSL-005 DIRECT MEASURING GUIDE



CSL-006 CANNULATED DRILL BIT 4.5MM/230MM



CSL-007 CANNULATED TAP 7.0MM

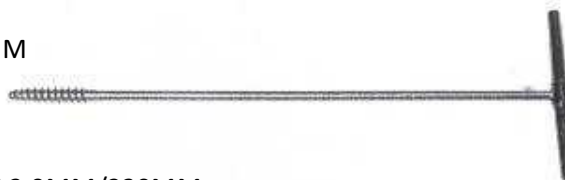

CSL-009 THREADED GUIDE WIRE 2.0MM/230MM



IMPLANTS (BOTH STAINLESS STEEL AND TITANIUM)

7.0MM CANNULATED SCREWS WITH 16MM THREADS

CAT NO	LENGTH
CSL-101	30MM
CSL-102	35MM
CSL-103	40MM
CSL-104	45MM
CSL-105	50MM
CSL-106	55MM
CSL-107	60MM
CSL-108	65MM
CSL-109	70MM
CSL-110	75MM
CSL-111	80MM
CSL-112	85MM
CSL-113	90MM
CSL-114	95MM
CSL-115	100MM
CSL-116	105MM
CSL-117	110MM
CSL-118	115MM
CSL-119	120MM



PROFILE	
HEAD DIAMETER	8.0MM
HEXAGONAL SOCKET WIDTH	3.5MM
SHAFT DIAMETER	4.5MM
THREAD DIAMETER	7.0MM
CORE DIAMETER	4.5MM
THREAD LENGTH	16.0MM
CANNULATION	2.1MM
DRILL BIT	4.5MM
TAP	7.0MM

IN TITANIUM SAME SPECIFICATI ONS ARE FROM
CSL-201 TO CSL-219

7.0MM CANNULATED SCREWS WITH 32MM THREADS

CSL-301	30MM
CSL-302	35MM
CSL-303	40MM
CSL-304	45MM
CSL-305	50MM
CSL-306	55MM
CSL-307	60MM
CSL-308	65MM
CSL-309	70MM
CSL-310	75MM
CSL-311	80MM
CSL-312	85MM
CSL-313	90MM
CSL-314	95MM
CSL-315	100MM
CSL-316	105MM
CSL-317	110MM
CSL-318	115MM
CSL-319	120MM



PROFILE	
HEAD DIAMETER	8.0MM
HEXAGONAL SOCKET WIDTH	3.5MM
SHAFT DIAMETER	4.5MM
THREAD DIAMETER	7.0MM
CORE DIAMETER	4.5MM
THREAD LENGTH	32.0MM
CANNULATION	2.1MM
DRILL BIT	4.5MM
TAP	7.0MM



WASHER 13 MM DIAMETERS

CSL-320
IN TITANIUM SAME SPECIFICATIONS ARE
FROM CSL-401 TO CSL-420



ORTHON CANNULATED SCREW INSTRUMENTS 4.0MM



IN STERILIZING CONTAINER

ITEM NUMBER: INS-O-CSS

CAT NO	DESCRIPTION	QUANTITY
CSS-001	SELF HOLDING SCREW FORCEPS	1
002	DOUBLE DRILL SLEEVE 2.7/1.2MM	1
003	SMALL CANNULATED SCREW DRIVER	1
CSS-004	HOLDING SLEEVE FOR CSS-O-003	1
CSS-005	DIRECT MEASURING DEVICE	1
CSS-006	CANNULATED DRILL BIT 2.7MM	1
CSS-007	CANNULATED TAP	1
CSS-008	STYLET 2.0MM	1
CSS-009	THREADED GUIDE WIRE 2.0MM	1
CSS-010	DRILL SLEEVE 3.5/2.7MM WITH STOP	
1	CSS-011 COUNTERSINK CANNULATED	1

CSS-001 QUICK COUPLING TAP HANDLE
CSS-002 DOUBLE DRILL SLEEVE 2.7/1.2MM



CSS-003 SELF HOLDING SCREW FORCEPS



CSS-004 CANULATED SCREW DRIVER



CSS-005 HOLDING SLEEVE FOR CSS-O-004



CSS-06 DIRECT MEASURING DEVICE



CSS-007

DRILL SLEEVE WITH STOP

3.5/2.7MM



CSS-008

CANNULATED DRILL BIT 2.7MM/160MM



CSS-009

CANNULATED TAP 4.0MM



CSS-010

CANNULATED COUNTERSINK



CSS-011

THREADED GUIDE PIN 1.25/150MM



IMPLANTS (IN BOTH STAINLESS STEEL AND TITANIUM)

4.0MM CANNULATED SCREWS SHORT THREADED

CAT NO	LENGTH
CSS-101	10MM
CSS-102	12MM
CSS-103	14MM
CSS-104	16MM
CSS-105	18MM
CSS-106	20MM
CSS-107	22MM
CSS-108	24MM
CSS-109	26MM
CSS-110	28MM
CSS-111	30MM
CSS-112	32MM
CSS-113	34MM
CSS-114	36MM
CSS-115	38MM
CSS-116	40MM
CSS-117	42MM
CSS-118	44MM
CSS-119	46MM
CSS-120	48MM
CSS-121	50MM



PROFILE	
HEAD DIAMETER	5.0MM
HEXAGONAL SOCKET WIDTH	2.5MM
THREAD DIAMETER	4.0MM
CORE DIAMETER	2.5MM
SHAFT DIAMETER	2.7MM
DRILL BIT	2.7MM
TAP	4.0MM

WASHER SMALL 7.0 MM DIAMETERS

CSS-122



IN TITANIUM SAME SPECIFICATIONS ARE FROM

CSS-201 TO CSS-221